

DAV PUBLIC SCHOOL

ROTARY CAMPUS, ASHOK NAGAR, DISTT- GAYAJI, BIHAR- 823001

Ph.No.: 0631-2950279 E-mail: davashoknagar@gmail.com. Website: davrcangaya.org

(Managed by : DAV College Managing Committee, New Delhi-55)

Ref. No.: DAV/RC.AN/Gaya/2025/322

Dated: 08/11/2025

TENDER NOTICE

Sealed quotations are invited from reputed and experienced firm as per the following details:

1	Name of The Works	Making of flower lane near waiting shed (front of Hansraj Block)
2	Estimated Area	As per estimates and Drawing
3	Approved estimated total amount	Rs. 32,033/- (including GST)
4	Description of Renovation / Construction work	Making of flower lane near waiting shed
5	Time of Completion	30 Days from the issue of work order
6	Date of Tender Notification	08/11/2025 (Saturday)
7	Last Date/Time for Receipt of Bids	15/11/2025 (Saturday) 2.00 P.M.
8	Name and Address of office Inviting Tender	Principal, DAV Public School, Rotary Campus, Ashok Nagar, Gaya Ji, Bihar & Assistant Regional Officer, Bihar Zone-H, CRRC, Medical Road, Gaya Ji, Bihar
9	Contact Number of Procurement Office	0631-2950279

FOLLOWING POINTS NEED ATTENTIONS

1. Only the quality materials (Branded Company) and standard workmanship will be accepted.
2. **Each interested firm will submit the two sealed quotations viz financial bid and technical bid. Please submit duly filled up mandatory proforma by tenderer.**
3. The School shall not be liable to pay any tax, freight, etc. which has not been expressly stipulated in the TDS as per rule of Income Tax.
4. The undersigned does not bind himself / herself to accept the lowest quotation and reserves the right to accept the quotation in whole or in part i.e., with respect to all the articles mentioned in the attached statement or in respect of one or more than one articles specified on the attached statement as he/she may decide.
5. On acceptance of the quotation it will become a contract and the contractor shall be bounded by the terms and conditions of the quotation as well as Contractor must fulfill the terms and conditions of Government of India / State Government.
6. The quantity of articles indicated in the attached statement may be increased or decreased at the discretion of the undersigned without assigning any reason.
7. The rates quoted by the contractor shall hold good upto finishing of the renovation / construction works. No amendment will be accepted in the approved rate.
8. Rates quoted should be inclusive of all taxes, no extra charges will be paid.
9. The description of the construction details can be had from the office of the ARO Bihar Zone- H , C/O DAV Public School, CRRC, Medical Road, GayaJi, Bihar or from the Principal of DAV Public School, Rotary Campus, Ashok Nagar, Gaya Ji.
10. The payment will be made to the contractor after deduction of **retention money** through A/C payee cheque as per the agreement and duly approved by the Architect.
11. Quotations which do not comply with the above conditions are liable to be rejected.
12. The site proposed map, estimate and terms and condition are open for inspection before binding for all interested person.
13. All due formalities related to safety and security of the laborers (as per Government norms) is sole responsibility of the firm who will accept the work.
14. Management of wastage will be the responsibility of the firm (Contractor) and expenses will be incurred on it will be borne by the selected firm (Contractor).
15. Please note that the under-signed may change the dates or cancel the tender as well at any time without prior information

16. The payment of building Cess : Under the provision of building and other construction Workers' Welfare Cess Act, the contractor is responsible to pay building and other construction Workers' Welfare Cess, in relation to a building or other construction work to State Govt.
17. All dispute subject to Gaya Ji Jurisdiction only.

[Signature]
8/11/25
(Principal)
[Signature]

D.A.V. Public School
Rotary Campus, Ashok Naga
Gaya (Bihar)

**DAV PUBLIC SCHOOL, ROTARY CAMPUS,
ASHOK NAGAR, Distt: GAYAJi, BIHAR**

Proforma to be filled by the Tenderer Mandatory for :

_____ (Name of the work) at
DAV Public School, Rotary Campus, Ashok Nagar, Gaya, Bihar.

1. Name & Complete Address of Firm / Company:

Telephone No. /																			
Mobile No:																			
Email ID:																			
2. Name of Proprietor / Manager/Contact Person																			
with Contact No.																			

3. Registration No. & Date :

.....

4. Certificate from Govt. Dept. (Yes / No)

.....

Issuing Authority

5. GST Registration No.:

.....

6. Proof of last GST return (Yes / No)

.....

7. PAN Card No.

.....

8. Aadhar No.:

.....

9. Proof of 3 years work experience with Govt. Dept./PSU's or any other having similar kind of jobs (Yes/No). If Yes, please attach any documents.....

10. Rate including GST attached : (Yes / No).....

I/ We certify that the information furnished above is true and correct. In case, any of such information / documents furnished by me / us are found to be fictitious, it would be deemed to be a breach of T&C and liable for legal action.

Name with Designation of Authorised Signatory &

Ref. No. DAY-AN/SB/FL/AV/25-26

Dated 2.11.2025

A-45, Mohan Garden Extn.
(Near Durga Mandir)Najafgarh Road,
New Delhi - 110059

Mob. : 9430001170

9973550049

E-mail : arch252@gmail.com

PAN No. : ATEPS 5218B

507(A), Ganga-A, Vastu Vihar,
Phase-VI, AllMS-1, NH- 139,
Naubatpur Road, Bhusaula,
Danapur, Patna, Bihar, Pin- 801505,
Post-Moharapur, Via Phulwari Sharif,
Near Ashwani School

Mob: 9430001170

9430602121

9973550049

REPORT**ESTIMATE OF COST OF FLOWER LANE AT D.A.V. PUBLIC SCHOOL, ROTARY CLUB CAMPUS,
ASHOK NAGAR, GAYA, BIHAR.**

<u>S.NO.</u>	<u>DESCRIPTION</u>	<u>AREA (SFT.)</u>	<u>COST (RS.=P.)</u>	<u>COST/SFT.(RS.=P.)</u>
1.	Flower lane near waiting shed	127.10	32033.00	252.03
	-----	-----	-----	-----
	TOTAL	127.10	32033.00	252.03

The estimated cost is based on Govt. of Bihar, PSR-01-01-2022. For non schedule items, market rate has been taken into account. The estimated cost may vary due to variations in site condition, changes in drawings and specifications.

Details of the estimate of above item is attached with this. The over all cost of construction on per square feet basis, on the basis of the mode of measurement of areas adopted by D.A.V. Public School, comes to Rs. 252.03 (Rs. Two hundred fifty two and paise three only).

Issued without prejudice.

BINOD KUMAR SINGH.



archgrouparchitects , engineers,
interior designeres507(A),GANGA-A,VASTU VIHAR,PH-VI,AIIMS-1,NH-139,NAUBATPUR RD,BHUSAULA,PATNA-801505,BIHAR,M-9430001170
REF:-DAV-AN/SB/FL/01/25-26

Date:- 2 NOV. 2025

FOR TECHNICAL APPROVAL

ABSTRACT OF COST OF FLOWER LANE AT D.A.V. PUBLIC SCHOOL, ROTARY CLUB CAMPUS, ASHOK NAGAR, GAYA, BIHAR.						
Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
(1) FLOWER LANE NEAR WAITING SHED						
Area of Flower lane = 2x29'-5"x2'-2"= 127.10 Sft (11.81 Sqm)						
SECTION-I (EARTH WORK/SAND FILLING)						
1	2.8	Earth work in excavation in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, lift upto 1.5 m, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m.				
	2.8.1	All kinds of soil	1.38	Cum	360.70	497.77
SECTION-II (R.C.C. /P.C.C. WORK)						
2	4.1	Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering- all work upto plinth level.				
	4.1.5	1:3:6 (1 cement: 3 coarse sand: 6 graded stone aggregate 20 mm nominal size.)	0.35	Cum.	3434.00	1201.90
SECTION - III (MASONRY WORK)						
3	6.18A	Half brick masonry with bricks of class designation 100A in foundation and plinth in:				
	6.18.4A	Cement mortar 1:4 (1 cement: 4 coarse sand)	9.13	Sqm	599.30	5471.61
SECTION - IV (FLOORING WORK)						
4	11.72	Providing designation 100A one brick flat soling joints filled with local sand including cost of watering, taxes, royalty, all complete as per building specification and direction of E/I.	4.54	Sqm.	283.30	1286.18
5	11.36	Providing and laying first quality ceramic glazed wall tiles confirming to IS 15622(Thickness to be specified by manufacturer) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by engineer in charge in skirting, risers of steps and dados over 12mm thick bed of cement mortar 1:3 (1 cement, 3 coarse sand) and jointed with grey cement slurry @ 3.3 Kg/sqm including pointing in white cement mixed with pigment of matching shade complete.	13.67	Sqm	795.00	10867.65
6	11.23	Marble stone flooring with 18 mm thick marble stone				

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		(sample of marble shall be approved by Engineer-in-charge) over 20 mm (average) thick base of cement mortar 1:4 (1 cement; 4 coarse sand) laid and jointed with grey cement slurry including rubbing and polishing complete with:				
	11.23.5	Udaipur green marble	3.17	Sqm	1657.20	5253.32
		SECTION - V (PLASTERING WORK)				
7	13.11	12 mm cement plaster of mix				
	13.11.4	1:6 (1 cement; 6 coarse sand).	6.84	Sqm	141.50	967.86
8	13.12	15 mm cement plaster on rough side of single or half brick wall of mix				
	13.12.4	1:6 (1 cement; 6 coarse sand).	9.13	Sqm	162.80	1486.36
		SECTION - VI (DISMANTLING WORK)				
9	MR	Dismantling of platform and disposal of rubbish to municipal ground etc. complete.	LS			5000.0
		TOTAL				32032.66
		ROUNDUP				32033.00
		Cost of construction per sq. ft.				252.03

7"
GREEN MARBLE 18 MM THK.

GLAZED TILES BOTH SIDE

GL

3" P.C.C. 1:3:6


3" BRICK SOLING
COMPACT EARTH

SECTION 'A-A' (ENL.)


CEMENT - LAFARGE/BANGUR/PRISM/ACC
STONE - PAKUR/KARWANDIA
SAND - GANGA/SONE/BATENE
BRICK - 1ST CLASS

SIDE ELEVATION


- NOTE:-
1. 18 MM THK. UDAIPUR GREEN MARBLE WILL BE FIXED ON TOP OF FLOWER LANE.
 2. WALL TILES OF BAJAJ/SOMANY/KAJARIA/NITCO WILL BE FIXED ON INSIDE & OUT SIDE WALL.
 3. FLOWER LANE IN TWO LANES WILL BE MADE AS PER SITE CONDITION.
 4. P.C.C 1:3:6 WILL BE CASTED IN FOOTING OVER BRICK FLAT SOLING.
 5. PLATFORM OF SIZE 22'-5"X7'-0" WILL BE FULLY DISMANTLED.

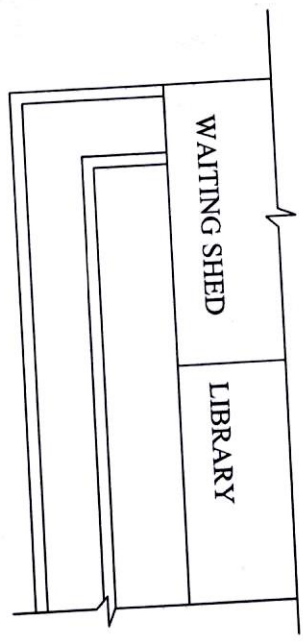

PART LAYOUT PLAN

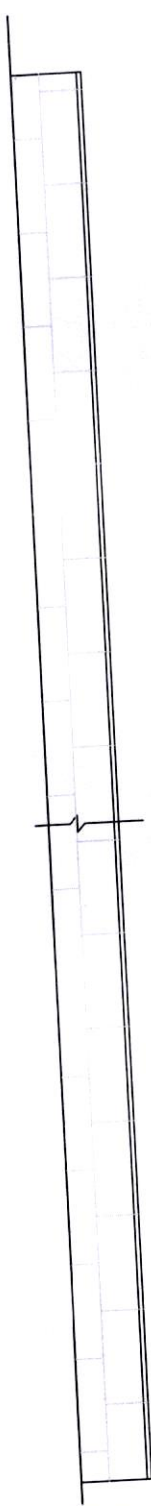

FRONT ELEVATION (PART)

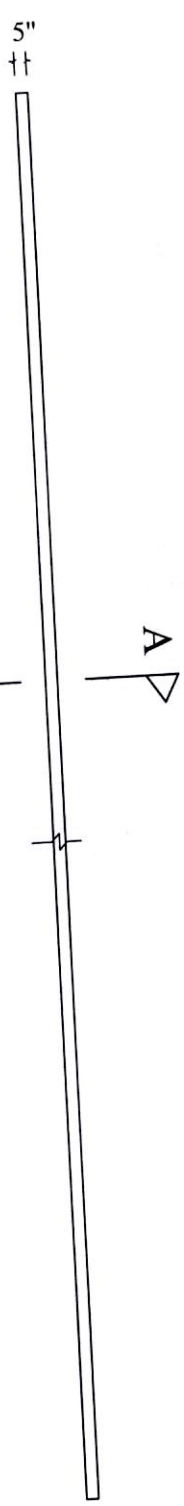

GROUND FLOOR PLAN (PART)

TOTAL LENGTH = 58'-10"

SIZE OF FLOWER LANE = 2X29'-5"X2'-2"

PROJECT
PROPOSED FLOWER LANE AT D.A.V. PUBLIC SCHOOL,
ROTARY CLUB CAMPUS, ASHOK NAGAR, GAYA, BIHAR.

DRG. NO.-01		DATE	archgroup architects, engineers, interior designers, 507(A), GANGA-A, VASTU VIHAR, PH-6, NH-139, NAUBATPUR ROAD, AIIMS-1, BHUSAULA, PATNA-801505.
TITLE FLOWER LANE DET.		NOV. -25	

(Not written sheet)