


TENDER NOTICE

1	Name of The Works	Renovation of staff toilet on first floor of the school.
2	Estimated Area	31.5 Sq. ft.
3	Time of Completion	10 Days
4	Date of Tender Notification	25.07.2023
5	Last Date/Time for Receipt of Bids	31.07.2023
6	Name and Address of office Inviting Tender	Principal, DAV Public School, Rotary Campus, Ashok Nagar, Gaya.
7	Contact Number of Procurement Office	0631-2950279
8	Help Numbers	6205946442

Following points need attention

01. The School shall not be liable to pay any tax, freight, etc. which has not been expressly stipulated in the quotation in the event of acceptance of the quotation. The School will deduct TDS as per rule of Income Tax.
02. The undersigned does not bind him to accept the lowest quotation and reserves the right to accept the quotation in whole or in part i.e., with respect to the entire article mentioned in the attached
03. Statement or in respect of one or more than one articles specified in the attached statement as he may decide.
04. On acceptance of the quotation it will become a contract and the contractor shall be bound by the terms and conditions of the quotation as well. Contractor must fulfill the terms and conditions of Government of Bihar as well as govt. of India.
05. The quantity of articles indicated in the attached statement may be increased or decreased at the discretion of the undersigned without assigning any reason.
06. The rates quoted by the contractor shall hold good upto finishing of the renovation works. No amendment will be accepted in the rate of renovation.
07. The description of the said renovation works in details can be had from the office of either RO/Dy. R.O./ARO Bihar Zone- H or from the Principal of DAV Public School, Rotary Campus, Ashok Nagar, Gaya. The payment will be made to the contractor through A/C payee cheque after the finishing of the work and duly approved by the architect.
08. Quotations which do not comply with the above conditions are liable to be rejected.
09. Non-completion of works within the stipulated time, the contractor will be liable to pay penalties as decided by the Building Sub-Committee, except the special circumstances if any.

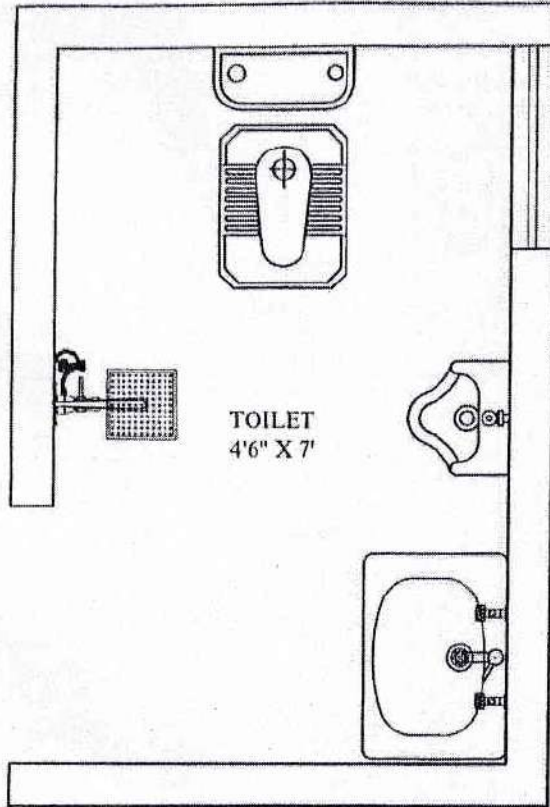

Principal
Principal
D.A.V. Public School
Rotary Campus, Ashok Nagar
Gaya (Bihar)

ABSTRACT OF ESTIMATE FOR INTERIOR FINISHING OF STAFF TOILET ON 1ST FLOOR AT DAV PUBLIC SCHOOL,
ROTARY CAMPUS, GAYA

Serial	SoR	Particulars	Quantity	Rate	Unit	Amount
1	mr	Demolishing existing flooring and plumbing set along with setting up new plumbing layout (labour charges included)	lumsun			
		TOILET (4'6" X 7') x				
2	11.36	Providing and laying Ceramic glazed floor tiles 300x300 mm (thickness to be specified by the manufacturer) of 1st quality conforming to IS : 15622 of approved make in colours such shades except white, Ivory, Grey, Fume Red, Brown, laid on 20 mm thick Cement mortar 1:4 (1 cement: 4 coarse sand) including pointing the joints with white cement and matching pigment etc., complete.	2.9		Sq m	
3	11.36	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS : 15622 (Thickness to be specified by the manufacture) of approved make in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-charge in skirting, floors of steps and dados over 12 mm thick bed of cement Mortar 1:3(1 cement: 3 coarse sand) and jointing with grey cement slurry @ 3.3 kg per sqm including pointing in white cement mixed with pigment of matching shade complete. (4' HIGH)	9.0		Sq m	
4	13.80 A.1	Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete. (WALLS AND CEILING)	20		sqm	
5	13.78.1	Providing one coat of cement primer of approved brand and manufacture on wall surface all complete (WALLS AND CEILING)	20		Sq m	
6	13.79.1	Providing water proof cement paint of approved brand and manufacture and of required shade to give and even shade three or more coat on new work all complete (WALLS AND CEILING)	20		Sq m	
7	14.80.2	Providing & fixing White vitreous china water closet squatting pan (Indian type) along with "S" or "P" trap including dismantling of old WC seat and "S" or "P" trap at site complete with all operations including all necessary materials, labour and disposal of dismantled material &c maiba, all complete as per the direction of Engineer-in charge, Orissa pattern W.C Pan of size 580x440 mm	1.0		EACH	

8	17.4.2	Range of two urinal basins with 5 litre white P.V.C. automatic flushing cistern	1.0		EACH
9	17.7.8	White Vitreous China Surgeon type wash basin of size 660x400 mm with a pair of 15 mm C.P. brass pillar taps with elbow operated levers (With all fittings and labour)	1.0		EACH
10	18.3.3	Providing and fixing Polyethylene-Aluminium-Polyethylene (PE-ALPE) Composite Pressure Pipes conforming to IS - 15450, including all special fittings of composite materials 2025 (25 mm OD) pipe	60.0		metre
11	N A	WB socket		LUMSUM	
12	N A	light points plus electrical fixture (labour included)		LUMSUM	
13	N A	geyser of approved brand (providing and fixing)		LUMSUM	
14	N A	exhaust fan (providing and fixing)		LUMSUM	
15	N A	soap holder, towel holder and other miscellaneous accessories		LUMSUM	
16	N A	Shower,taps etc		LUMSUM	
				Total	

Note:
Rate are inclusive of GST



STAFF TOILET ON 1ST FLOOR