

DAV PUBLIC SCHOOL

ROTARY CAMPUS, ASHOK NAGAR, DISTT- GAYA, BIHAR- 823001

Ph.No.: 0631-2950279 E-mail: davashoknagar@gmail.com. Website: davrcangaya.org

(Managed by : DAV College Managing Committee, New Delhi-55)

Ref. No- DAV/RLAN/GAYA/2025/444

TENDER NOTICE

Date - 01/02/2025

Sealed quotations are invited from reputed and experienced firm as per following details.

1	Name of The Works	Chequered tile flooring
2	Estimated Area	2248.50 SFT
3	Approved estimated total amount	161718/-
4	Description of Renovation / Construction work	Chequered tiles in North side of MT.Buddha Block in front of Lobby & N.D. Grover Block
5	Time of Completion	30 days from issue of work order
6	Date of Tender Notification	01/02/2025
7	Last Date/Time for Receipt of Bids	08/02/2025
8	Name and Address of office Inviting Tender	Principal, DAV Public School, Rotary Campus, Ashok Nagar, Gaya.
9	Contact Number of Procurement Office	0631-2950279

FOLLOWING POINTS NEED ATENTIONS

1. Only the quality materials (Branded Company) and standard workmanship will be accepted.
2. Each interested firm will submit the two sealed quotations viz financial bid and technical bid.
3. The School shall not be liable to pay any tax, freight, etc. which has not been expressly stipulated in the quotation in the event of acceptance of the quotation. The School will deduct TDS as per rule of Income Tax.
4. The undersigned does not bind himself / herself to accept the lowest quotation and reserves the right to accept the quotation in whole or in part i.e., with respect to all the articles mentioned in the attached statement or in respect of one or more than one articles specified on the attached statement as he/she may decide.
5. On acceptance of the quotation it will become a contract and the contractor shall be bounded by the terms and conditions of the quotation as well as Contractor must fulfill the terms and conditions of Government of India / State Government .
6. The quantity of articles indicated in the attached statement may be increased or decreased at the discretion of the undersigned without assigning any reason.
7. The rates quoted by the contractor shall hold good upto finishing of the renovation / construction works. No amendment will be accepted in the approved rate.
8. Rates quoted should be inclusive of all taxes, no extra charges will be paid.
9. The description of the construction details can be had from the office of the ARO Bihar Zone- H , C/O DAV Public School, CRRC, Medical Road, Gaya, Bihar or from the Principal of DAV Public School, Rotary Campus, Ashok Nagar, Gaya.
10. The payment will be made to the contractor after deduction of **retention money** through A/C payee cheque as per the agreement and duly approved by .
11. Quotations which do not comply with the above conditions are liable to be rejected.
12. The site proposed map, estimate and terms and condition are open for inspection before binding for all interested person.
13. All due formalities related to safety and security of the laborers (as per Government norms) is sole responsibility of the firm who will accept the work.
14. The payment of building Cess : Under the provision of building and other construction Workers' Welfare Cess Act, the contractor is responsible to pay building and other construction Workers' Welfare Cess, in relation to a building or other construction work to State Govt.
15. All dispute subject to Patna Jurisdiction only.

(Principal)

Principal

D.A.V. Public School
Rotary Campus, Ashok Naga
Gaya (Bihar)

archgrouparchitects , engineers,
interior designeres507(A),GANGA-A,VASTU VIHAR,PH-VI,AIIMS-1,NH-139,NAUBATPUR RD,BHUSAULA,PATNA-801505,BIHAR,M-9430001170
REF:-DAV-AN/SB/CTBBK/01/24-25

Date:- 21 OCT. 2024


FOR TECHNICAL APPROVAL

ABSTRACT OF COST OF CHEQUERRED TILES IN NORTH SIDE OF MT. BUDHA BLOCK, IN FRONT OF LOBBY & N.D GROVER BLOCK OF D.A.V. PUBLIC SCHOOL, ROTARY CLUB CAMPUS, ASHOK NAGAR, GAYA, BIHAR.						
Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		(A) Chequered tiles flooring -Area of Flooring = 1697.25+101.25 + 450 Sft. = 2248.50 Sft.				
		SECTION - I (FLOORING WORK)				
1	11.20	Chequered precast cement concrete tiles 22 mm thick with marble chips of size 6 mm in footpath & courtyard jointed with neat cement slurry mixed with pigment to match the shade of tiles including rubbing and cleaning etc.complete on 20 mm thick bed of cement mortar 1:4(1 cement: 4 coarse sand)				
	11.20.3	Dark shade using ordinary cement	208.97	Sqm	766.70	160217.30
		SECTION-II (MISCELLANEOUS WORK)				
2	MR	Dismantling, cleaning of floor and removing the debries etc. complete as per direction of Engineer-in-charge.	LS			1500.00
		TOTAL				161717.30
		ROUNDING OFF				161718.00
		Cost of construction per S.Ft.				71.92

NOTE:-22MM THICK CHEQUERED TILES WILL BE FIXED IN REQUIRED SLOPE AS PER SITE OVER EXISTING PCC FLOOR AFTER MAKING ROUGH AND CLEANING THE EXISTING FLOORING.


CEMENT - LAFARGE/BANGUR/PRISM/ACC
 STONE - PAKUR/KARWANDIA
 SAND - GANGA/SONE/BATENE
 CHEQUERED TILES-KAJARIA/ULTRATECH

109'-6"

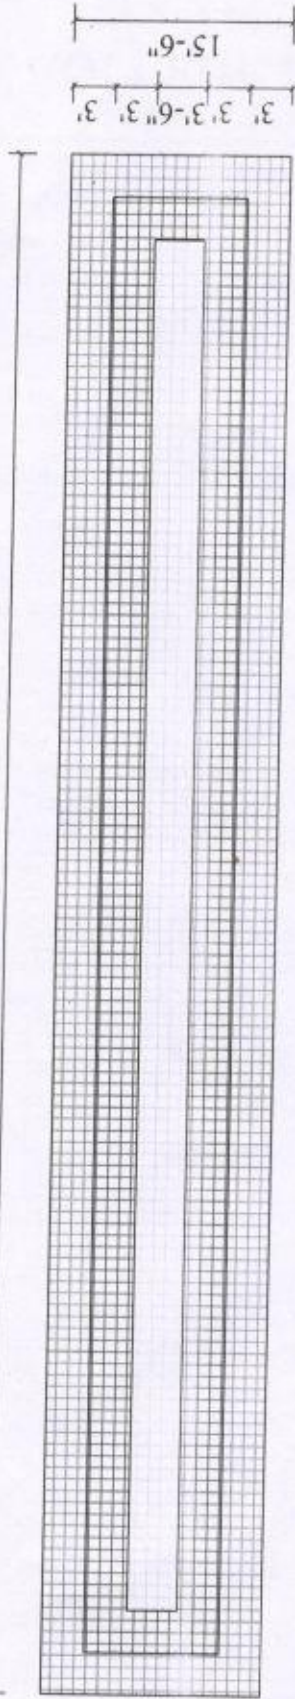


AREA OF 22 MM CHEQUERED TILES IN NORTH SIDE OF BUDHA BLOCK = $109'-6'' \times 15'-6'' = 1697.25$ SFT

33'-9"



AREA OF 22 MM CHEQUERED TILES NEAR ENTRANCE LOBBY = $33'-9'' \times 3'-0'' = 101.25$ SFT



45'

AREA OF 22 MM CHEQUERED TILES IN ADJACENT AREA OF PORTICO OF N.D GROVER BLOCK = $45'-0'' \times 10'-0'' = 450$ SFT

PROJECT

PROPOSED CHEQUERED TILES IN NORTH SIDE OF MT. BUDHA BLOCK, IN FRONT OF LOBBY & N.D. GROVER BLOCK OF D.A.V. PUBLIC SCHOOL, ROTARY CLUB CAMPUS, ASHOK NAGAR, GAYA, BIHAR.

DRG. NO.-01

DATE
OCT.-24

TITLE
FLOORING DET.

archgroup

architects, engineers,
interior designers,
507(A), GANGA-A, PH-VI,
VASTU VIHAR, BHUSAULA,
NAUBATPUR ROAD, NH-98,